
MS Nocera

WHE-PAGER PHASE 2: DEVELOPMENT OF ANALYTICAL SEISMIC VULNERABILITY FUNCTIONS				
Author:				
Date:	1-Sep-09			
Structure type (describe as broadly as possible):	PAGER-STR Type MS			
Geographic or other limitations:	Nocera		Add rows as desired	
			Add lows as desired	
Choice of pushover curve parameters				
B. da as Varia	Units Parameter			
Pushover X-axis: Pushover Y-axis:		nent (Sd); or Roof displacement (Deltar). State units on (Sa); or base shear (V). State units.		
Elastic damping ratio:	Small-amplitude damping ratio, fraction of critical			
1st mode participation factor:	PFfR; generally 1.3 to 1.5; same as (effective height)/(total roof height)			
Effective mass coefficient: Building weight:	0.92 alpha1; generally 0.7 to 0.8 Weight of the fl W State units			
How were these values & pushover points derived?	Using FaMIVE data set			
Ref: D'Ayala D., Speranza E, 'Definition of Collapse	Mechanisms and Seismic Vulnerability of Historic Masonry		Add rows as desired	
Pushover Curve for this structure type				
See Figures 1-4 for sample pushover curves Pushover curve control point X Y Damping Comment				
Fusilovei cuive contioi poil	A 0 0	Control point for plotting purposes		
	B 0.006 0.28	E.g., yield point?		
	C 0.096333333 0.4 D 0.25 0	E.g., ultimate point? E.g., beginning of lower plateau?		
	E 0.25	Add rows as desired		
Optional: upper and lower-bound range of pushover curves for this structure type				
Upper-bound pushover curve, e.g., 99 out of 100 buildi Author's meaning of "upper bound":	ings of this type would have pushover curve inside the area b	bounded between this curve and the Y-axis?		
How were these values & pushover points derived?				
			Add rows as desired	
	See Figures 1-4 for sample pushover curves Optional upper-bound pushover curve	_		
Pushover curve control point		_		
	A 0 0	Control point for plotting purposes		
	В	E.g., yield point? E.g., ultimate point?		
	D	E.g., utilimate point? E.g., beginning of lower plateau?		
	E	Add rows as desired		
Author's meaning of "lower bound":	ings of this type would have pushover curve inside the area b	bounded between this curve and the X-axis?		
How were these values & pushover points derived?				
	0.5.		Add rows as desired	
	See Figures 1-4 for sample pushover curves Optional lower-bound pushover curve			
Pushover curve control poi				
	A 0 0	Control point for plotting purposes		
	B	E.g., yield point? E.g., ultimate point?		
	Ď	E.g., beginning of lower plateau?		
	E	Add rows as desired		
	Other removator	4		
Other requested parameters D14 O.253 median drift (in same units as pushover X-axis) associated with complete structural damage, i.e., drift with 50% chance that the structural component of the building cannot be economically repaired				
B14		ociated with complete structural damage. May need to be guessed		building carried be economically repaired
the median value of drift (in same units as pushover X-axis) associated with collapse, e.g., Sdc = (roof drift at collapse)/PFfR. indoor fatality rate given collapse. Many contributors may be unable to provide this value. Porter, Comartin, and Holmes will fill such gaps				
L15 PC		ontributors may be unable to provide this value. Porter, Comartin, given complete structural damage. Again Porter, Comartin, and Ho		
kshort		given complete structural damage. Again Porter, Comartin, and Ho Ithor can judge, this is the degradation factor for short-duration (M		
kmed	If HAZUS-style damping preferred, and au	uthor can judge, this is the degradation factor for medium-duration	(5.5 < M < 7.5) events	
klong		uthor can judge, this is the degradation factor for long-duration (M	>= 7.5) events	
Explain how these values were arrived at, providing cit	ations if appropriate		Add rows as desired	

MS Nocera

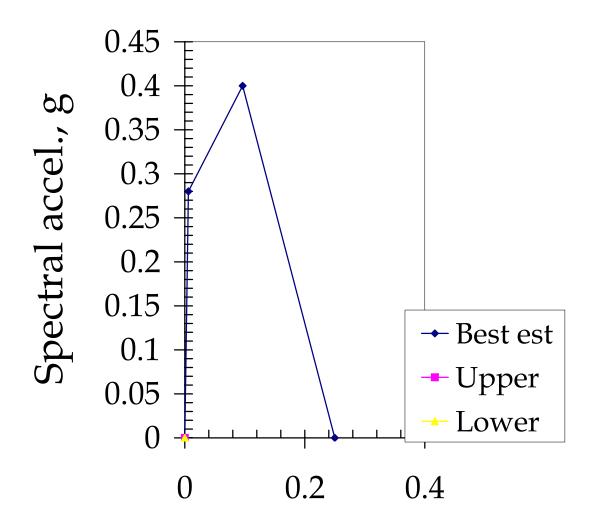

Spectral displ., Sd, m

MS Nocera

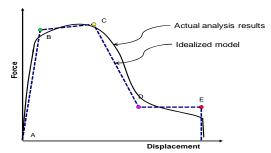


Figure 1: Force-displacement capacity boundary with all idealized segments present

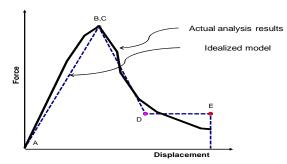


Figure 2: Force-displacement capacity boundary without strain hardening segment (e.g. buckling braced frame)

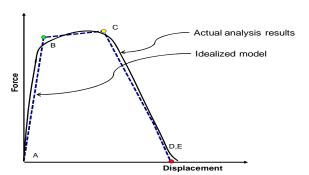


Figure 3: Force-displacement capacity boundary without lower strength plateau (e.g. unreinforced masonry)

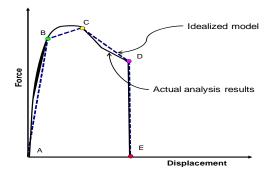


Figure 4: Force-displacement capacity boundary with pre-emptive vertical load failure