
UFB5 L'Aquila

WHE-	PAGER PHASE 2: DEVELOPMENT OF ANALYTICAL SEISMIC VULNERABILITY FUNCTIONS		
Author:			
Date:	1-Sep-09		
Structure type (describe as broadly as possible):	UFB5		
Geographic or other limitations:	L'Aquila		
		Add rows as desired	
	Choice of pushover curve parameters		
	Units Parameter		
Pushover X-axis:	Sd(m) Deltar Choose spectral displacement (Sd); or Roof displacement (Deltar). State units		
Pushover Y-axis: Elastic damping ratio:	Sa(g) Sa Choose spectra acceleration (Sa); or base shear (V). State units.  Small-amplitude damping ratio, fraction of critical		
1st mode participation factor:	PFfR; generally 1.3 to 1.5; same as (effective height)/(total roof height)		
Effective mass coefficient:	1 alpha1; generally 0.7 to 0.8		
Building weight:	Weight of the W State units		
How were these values & pushover points derived?			
Rei: D'Ayaia D., Speranza E, Definition of Collag	ose Mechanisms and Seismic Vulnerability of Historic Masonry Buildings' Earthquake Spectra: 19: 479-509	Add rows as desired	
	Pushover Curve for this structure type  See Figures 1-4 for sample pushover curves		
Pushover curve control poi			
	A 0 0 Control point for plotting purposes		
	B 0.000773 0.294 E.g., yield point?		
	C 0.0666667 0.42 E.g., ultimate point? D 0.12 0 E.g., beginning of lower plateau?		
	E Add rows as desired		
	, dd / 0110 dd 4001104		
	Optional: upper and lower-bound range of pushover curves for this structure type		
	ildings of this type would have pushover curve inside the area bounded between this curve and the Y-axis?		
Author's meaning of "upper bound":			
How were these values & pushover points derived?		Add rows as desired	
	See Figures 1-4 for sample pushover curves		
	Optional upper-bound pushover curve		
Pushover curve control poi	nt X Y Damping Comment  A 0 0 Control point for plotting purposes		
	B E.g., yield point?		
	C E.g., ultimate point?		
	D E.g., beginning of lower plateau?		
	Add rows as desired		
Lower-bound pushover curve, e.g., 99 out of 100 bu	illdings of this type would have pushover curve inside the area bounded between this curve and the X-axis?		
Author's meaning of "lower bound":	9		
How were these values & pushover points derived?			
	See Figures 1-4 for sample pushover curves	Add rows as desired	
	Optional lower-bound pushover curve		
Pushover curve control poi			
	A Control point for plotting purposes		
	E.g., yield point?		
	C E.g., ultimate point? D E.g., beginning of lower plateau?		
	E Add rows as desired		
	Other requested parameters		
D14 B14	not large enou median drift (in same units as pushover X-axis) associated with complete structural damage, i.e., drift with 50 not large enou logarithmic standard deviation of drift associated with complete structural damage. May need to be guessed	% chance that the structural component of the building cannot be econor	nically repaired
Sdc	the median value of drift (in same units as pushover X-axis) associated with collapse, e.g., Sdc = (roof drift at	collapse)/PFfR.	
L15	indoor fatality rate given collapse. Many contributors may be unable to provide this value. Porter, Comartin, al		
PC	mean fraction of building area collapsed, given complete structural damage. Again Porter, Comartin, and Holr	nes will fill gaps	
kshort	If HAZUS-style damping preferred, and author can judge, this is the degradation factor for short-duration (M <	= 5.5) events	
kmed	If HAZUS-style damping preferred, and author can judge, this is the degradation factor for medium-duration (f		
klong Explain how these values were arrived at, providing	If HAZUS-style damping preferred, and author can judge, this is the degradation factor for long-duration (M >= citations if appropriate	: 7.5) events	
the contract of the contr		Add rows as desired	

UFB5 L'Aquila

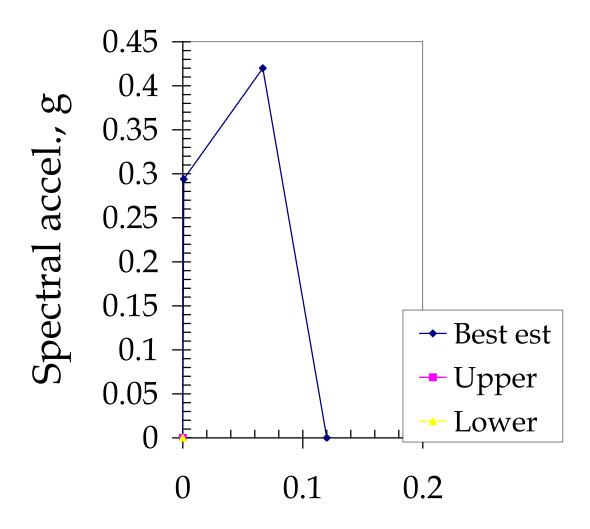

Spectral displ., Sd, m

UFB5 L'Aquila




Figure 1: Force-displacement capacity boundary with all idealized segments present




Figure 2: Force-displacement capacity boundary without strain hardening segment (e.g. buckling braced frame)




Figure 3: Force-displacement capacity boundary without lower strength plateau (e.g. unreinforced masonry)




Figure 4: Force-displacement capacity boundary with pre-emptive vertical load failure